


EWF40LS

Clear Polyester Window Film

EWF40LS is a Crystal Clear envelope window film designed for printing applications where heat resistance is required. Applications include thermography and printing window envelopes on specialty digital envelope presses.

Features

- Crystal Clear with exceptional clarity
- One side corona treated
- High gloss and stiffness
- Excellent printability
- Heat resistant
- High resistance to tear
- Contains NO recycled polymers
- Meets relevant FDA and EU regulations for direct food contact

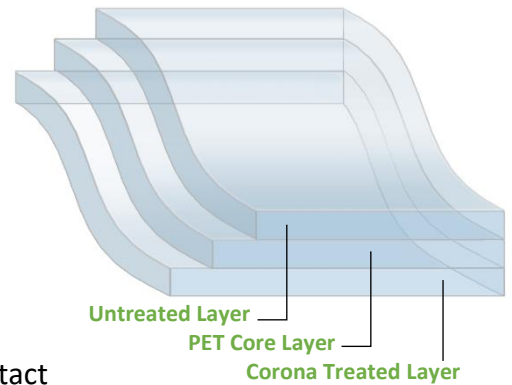

Typical Applications

Envelope Windows • Carton Windows • Labels • Transparencies • PPE
Thermal Forming • Flexible Packaging • Print & Lamination

Gauges Available

- 36 and 50 micron

Environmental Features



Petroleum Based

Environmental Features	Status
Recyclable	Yes - check with local authorities
Biodegradable	No
Home Compostable	No
Industrial Compostable	No

General Information

- Handling and Product Health and Safety details available on request
- Recommended storage in dry conditions between 30 °C and 5 °C
- Best used within 6 months of manufacture
- As for general Polyester our grade will start to soften at approx. 210 °C and will reach melting point at around 260 °C
- We recommend you let the film acclimatise in the production environment for 24 hours prior to use

Typical Properties

Properties		Test Method	Unit	36mu	50mu
Yield			m ² / kg	19.8	14
Grammage			g / m ²	50.2	68.9
Density		ASTM E252	g / c cm	1.395	
Tensile strength	MD	ASTM D882	kg / cm ²	1900	
	T D			1800	
Elongation	MD	ASTM D882	%	100	
	T D			90	
Thermal shrinkage 150 °C @ 30min	MD	ASTM D1204	%	2.8	
	TD			0.4	
Haze		ASTM D1003	%	4.0	
Coefficient of friction		ASTM D1894	film to film	0.60	
Surface tension		ASTM D2587	dynes / cm	54	
WVTR 38°C & 90% RH		ASTM E398	g / m ² / day	22	18
OTR 23°C & 90% RH		ASTM E398	cc / m ² / day	50	30

As all applications are subject to those conditions prevailing within specific applications, we recommend that a test be carried out to your satisfaction prior to full production.

The information and data contained in this document are given in good faith and supersede those given in any previous version. No liability, warranty or guarantee of final product performance is created by this document. No freedom from any patent is granted or to be inferred. This document does not constitute as a sales specification.

For the latest version of this document, please select the link below or scan the QR Code:



[Specification Sheet](#)

[Declaration of Compliance](#)

[BRCGS Certificate](#)

[ISO9001 Certificate](#)

Updated: May 2022