

Multiplastics (Europe) Limited Columbus House, 30 Manchester Road, Northwich, Cheshire, CW9 5ND

Tel: +44 (0) 1606 330011 sales@multiplastics.co.uk www.multiplastics.co.uk







LCF42RL


Recyclable Clear Polyester Heat Shrinkable Film



LCF42RL is a medium shrink/low stress heat-shrinkable polyester film with excellent uniformity and stability shrinking behaviours for packaging applications. It is suitable for the shrinking process by hot air, steam tunnels and radiant.

Features

- Exclusive Co-PET technology for shrink
- PCR recycle material content: 30%
- Same performance as virgin material
- Excellent printability
- High Gloss and stiffness
- Smooth shrinking curve with stable shrinkage
- Good for automatic sleeving machines
- PET (Recycle friendly) and not a PETG product

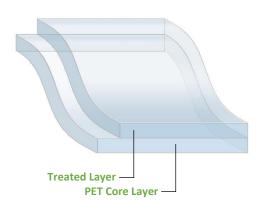


Typical Applications

• Shrink Label • Shrink Film • Shrink Sleeve

Gauges Available

40 and 45 micron

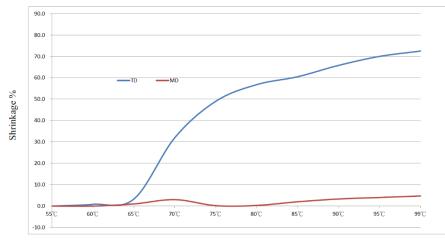

Temperature

The Association of Plastic Recyclers

Flexcraft Seaming Solutions

- 12-103 fast
- 468 medium speed
- 2130 fast
- 331 fast
- 12-103AT fast
- 7-72S medium
- 595HP slow
- 1484FX medium

Environmental Features



Petroleum Based

•			
Environmental Features		Status	
Recyclable		Yes - check with local authorities	
Degradable		No	
Home Compostat	ole	No	
Industrial Compos	stable	No	



Multiplastics (Europe) Limited Columbus House, 30 Manchester Road, Northwich, Cheshire, CW9 5ND

Tel: +44 (0) 1606 330011 sales@multiplastics.co.uk www.multiplastics.co.uk







General Information

- Handling and Product Health and Safety details available on request
- NEVER expose to sunlight, store in dry conditions between 37 °C and 10 °C
- Best used within 6 months of manufacture
- We recommend you let the film acclimatise in the production environment for 24 hours prior to use

Typical Properties

Properties		Test Method	Unit	40mu	45mu
Yield			M ² / kg	18.94	16.84
Grammage			g/m²	52.8	59.4
Density		ASTM E252	g/cm ³	1.32	
Tensile strength	MD T D	ASTM D882	PSi	9000 40000	
Shrinkage	MD	ASTM D1204	95°C 10 sec in water	2.0	
Haze	TD	ASTM D1003	% %	70 3	
Gloss @ 60°		ASTM D523		145	
Coefficient of friction		ASTM D1894	film to film	0.41 / 0.35	

As all applications are subject to those conditions prevailing within specific applications, we recommend that a test be carried out to your satisfaction prior to full production.

The information and data contained in this document are given in good faith and supersede those given in any previous version. No liability, warranty or guarantee of final product performance is created by this document. No freedom from any patent is granted or to be inferred. This document does not constitute as a sales specification.

